

The logo for onlumi, featuring the word "onlumi" in a bold, black, sans-serif font. The letter "o" is stylized with a green vertical bar to its left.


CE RoHS REACH

Beetle Clip X


Uniform 9-in-1 LED Strip Connector

How to Connect


1. Wire to Wire

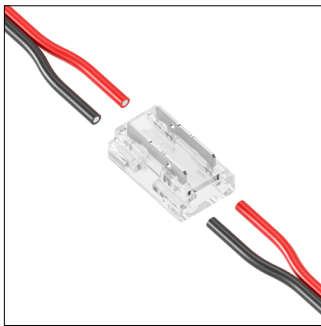


1. Align polarity



2. Insert and make both cables meet at middle




3. Clamp each pin vertically




4. Connection completed


2. Strip to Wire




1. Align polarity



2. Insert and make cable and tape meet at middle




3. Clamp each pin vertically




4. Connection completed


3. Strip to Strip Joint




1. Align polarity



2. Insert and make both tapes meet at middle




3. Clamp each pin vertically




4. Connection completed


4. L Shape Strip to Strip




1. Align polarity



2. Insert tapes as picture




3. Clamp each pin vertically




4. Connection completed


5. Corner Powered L Shape




1. Align polarity



2. Insert cable and tapes as picture




3. Clamp each pin vertically




4. Connection completed


6-1. T Shape Strip to Strip




1. Align polarity



2. Insert tapes as picture




3. Clamp each pin vertically




4. Connection completed


6-2. T Shape Strip to Strip




1. Align polarity



2. Insert tapes as picture




3. Clamp each pin vertically




4. Connection completed


7. Side Powered T shape




1. Align polarity



2. Insert cable and tapes as picture




3. Clamp each pin vertically




4. Connection completed


8. Side Power




1. Align polarity



2. Insert cable and tapes as picture




3. Clamp each pin vertically

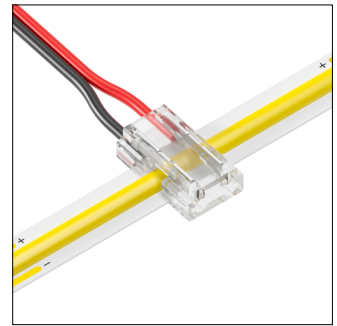


4. Connection completed


9. Cross Shape




1. Align polarity



2. Insert tapes as picture




3. Clamp each pin vertically



4. Connection completed


Firm Fixing

The pins can pierce and firmly fix the FPC of led strip which can not slide out of connector

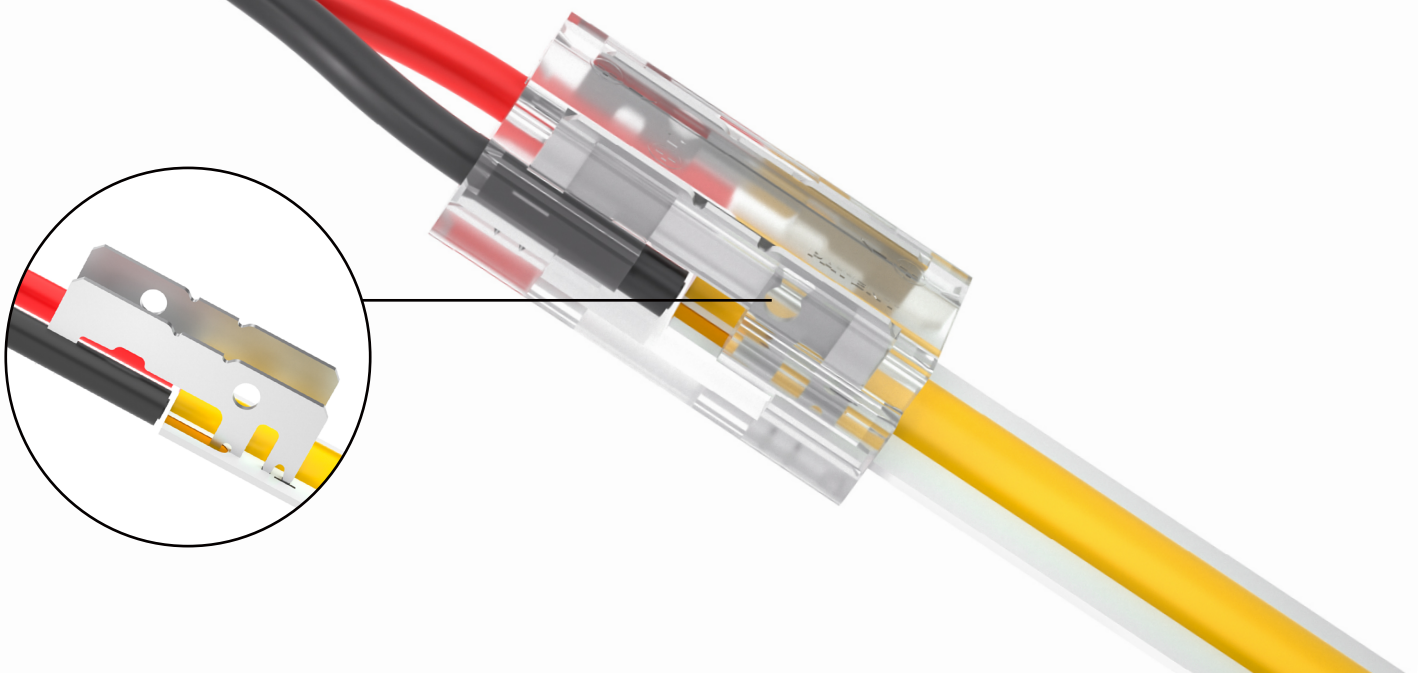


No dark area

Transparent design to achieve ultimate lighting effect









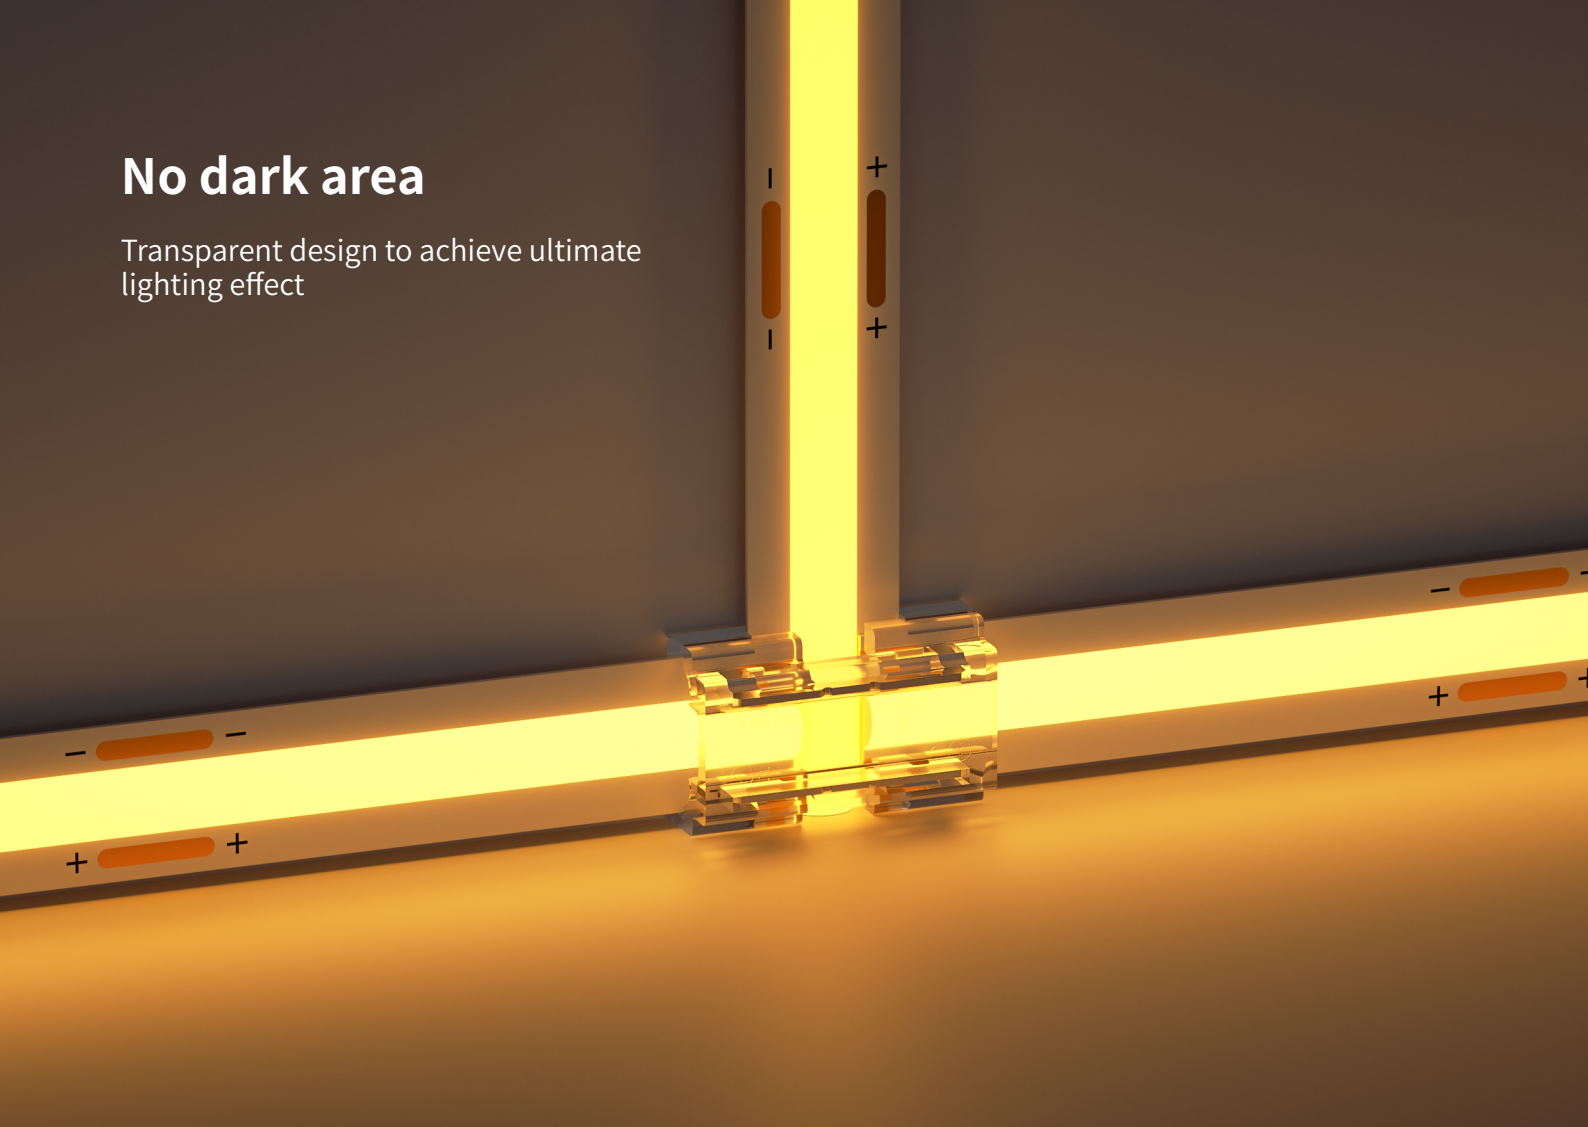



Work In Narrow Space

The slim housing can work in narrow space like aluminum channel, furniture groove and gaps, etc

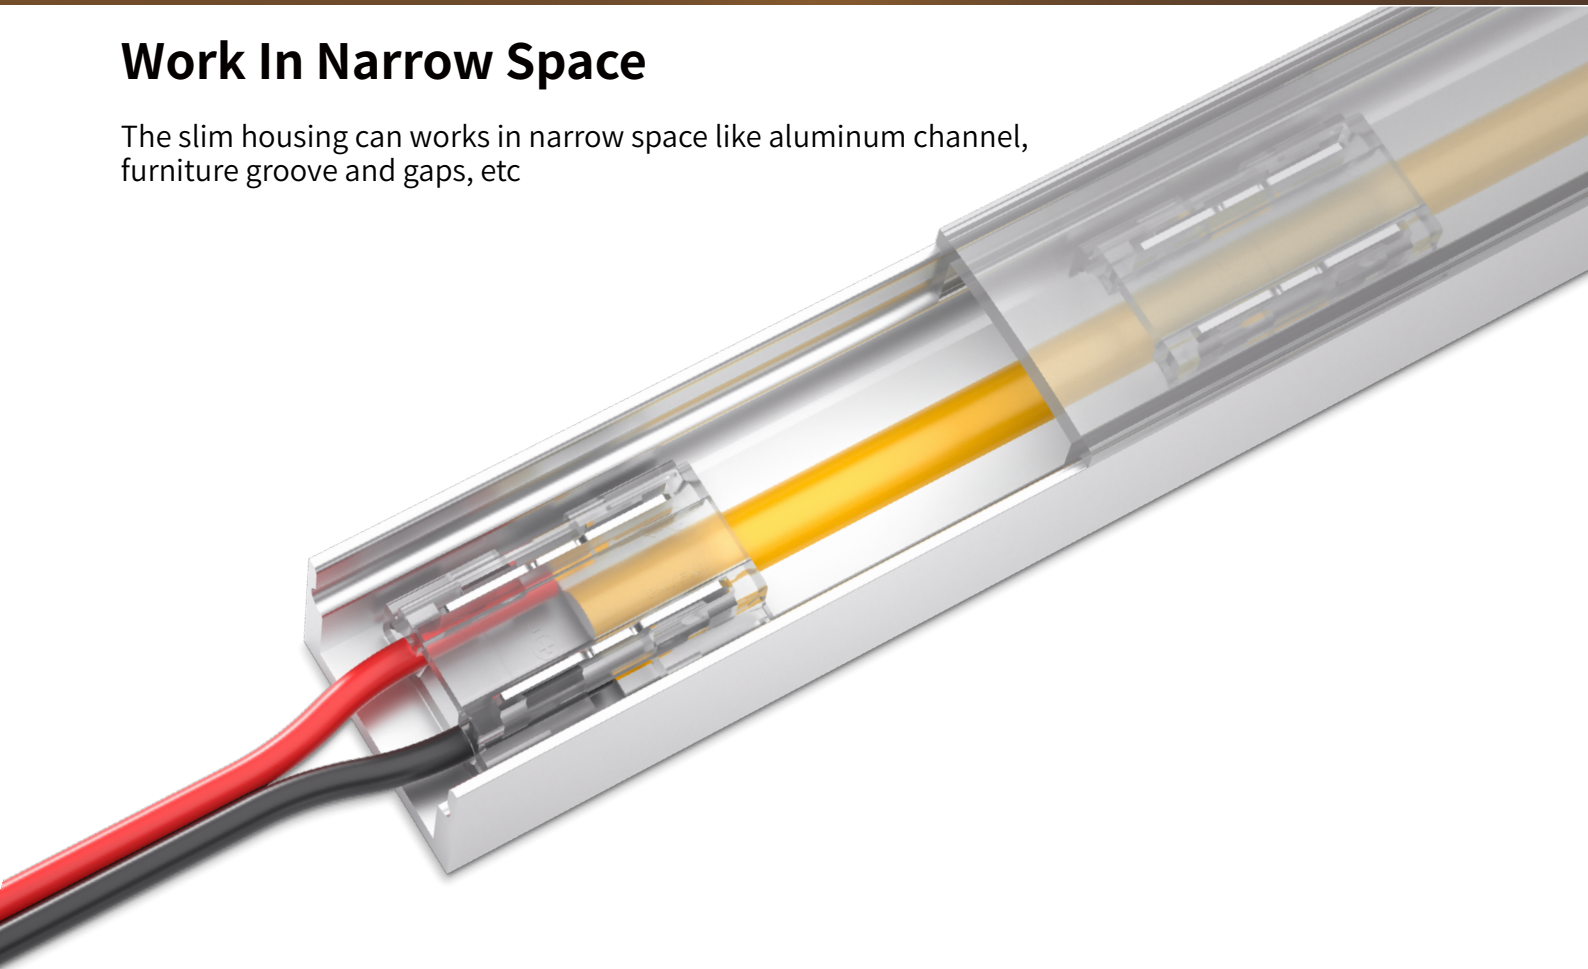

One Connector For 9 Types Use

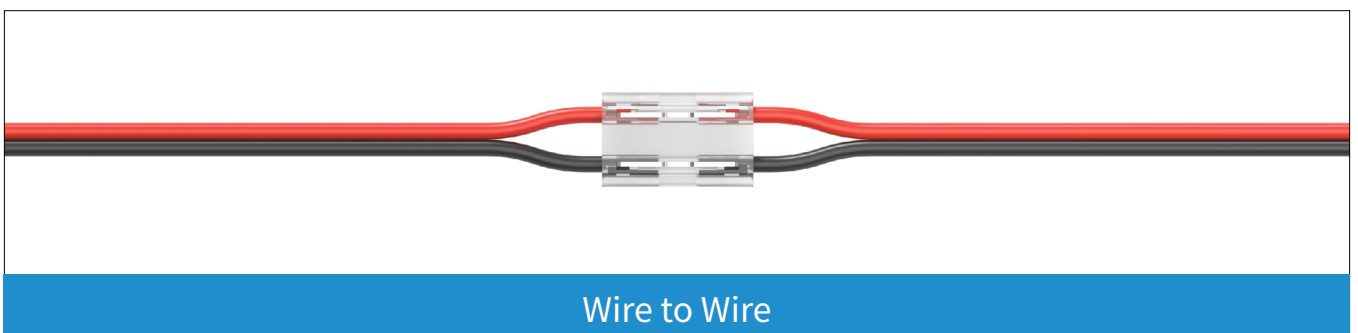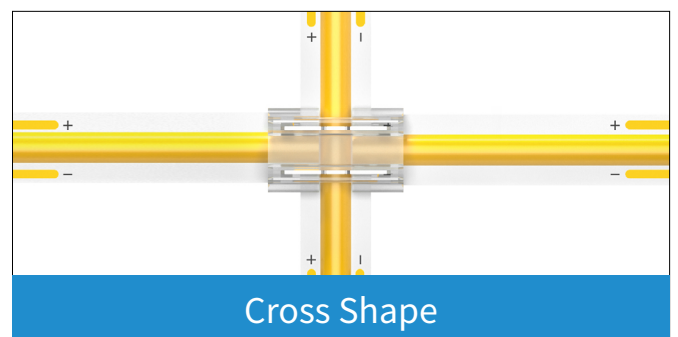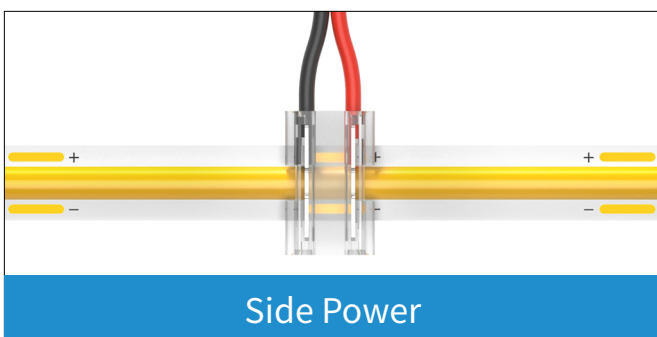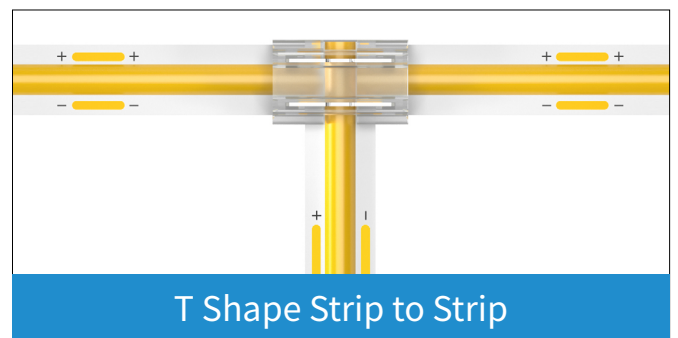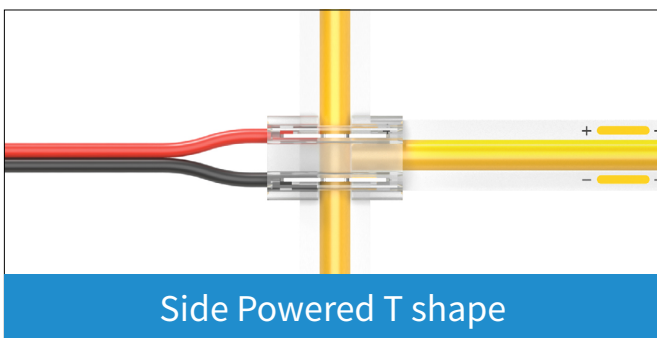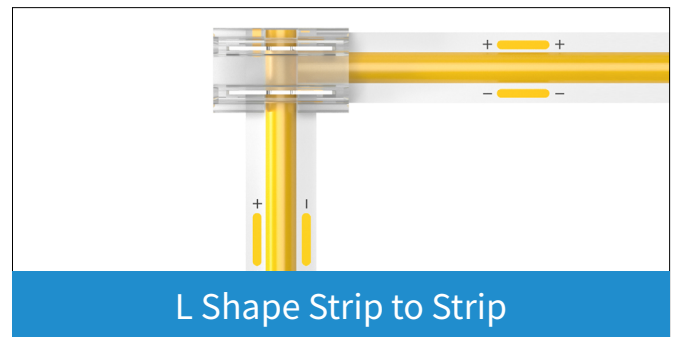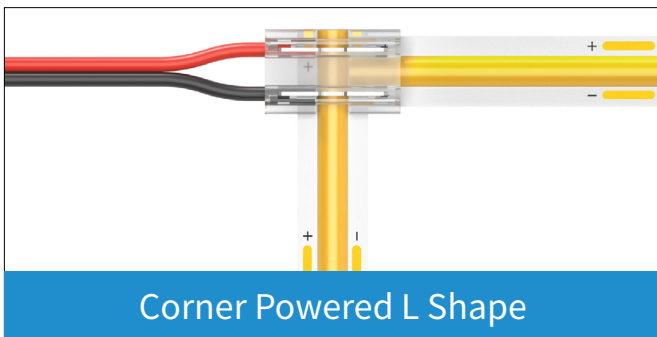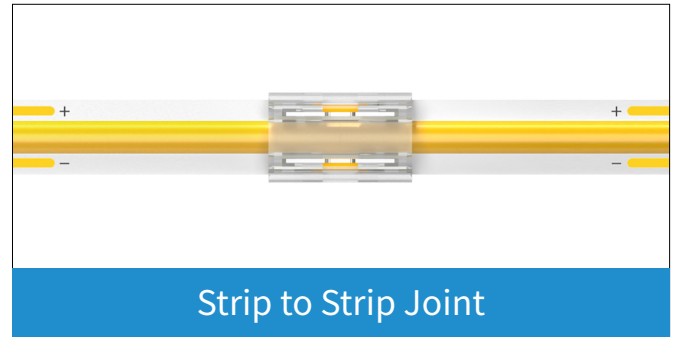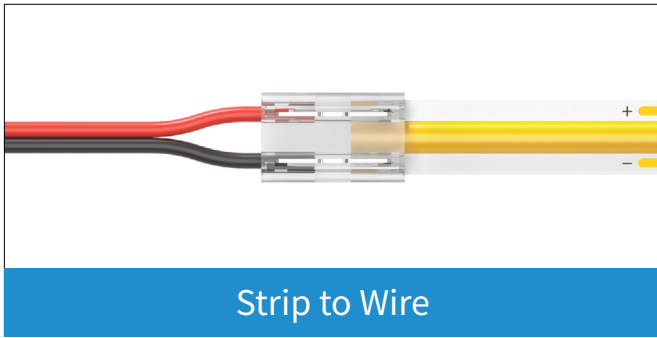

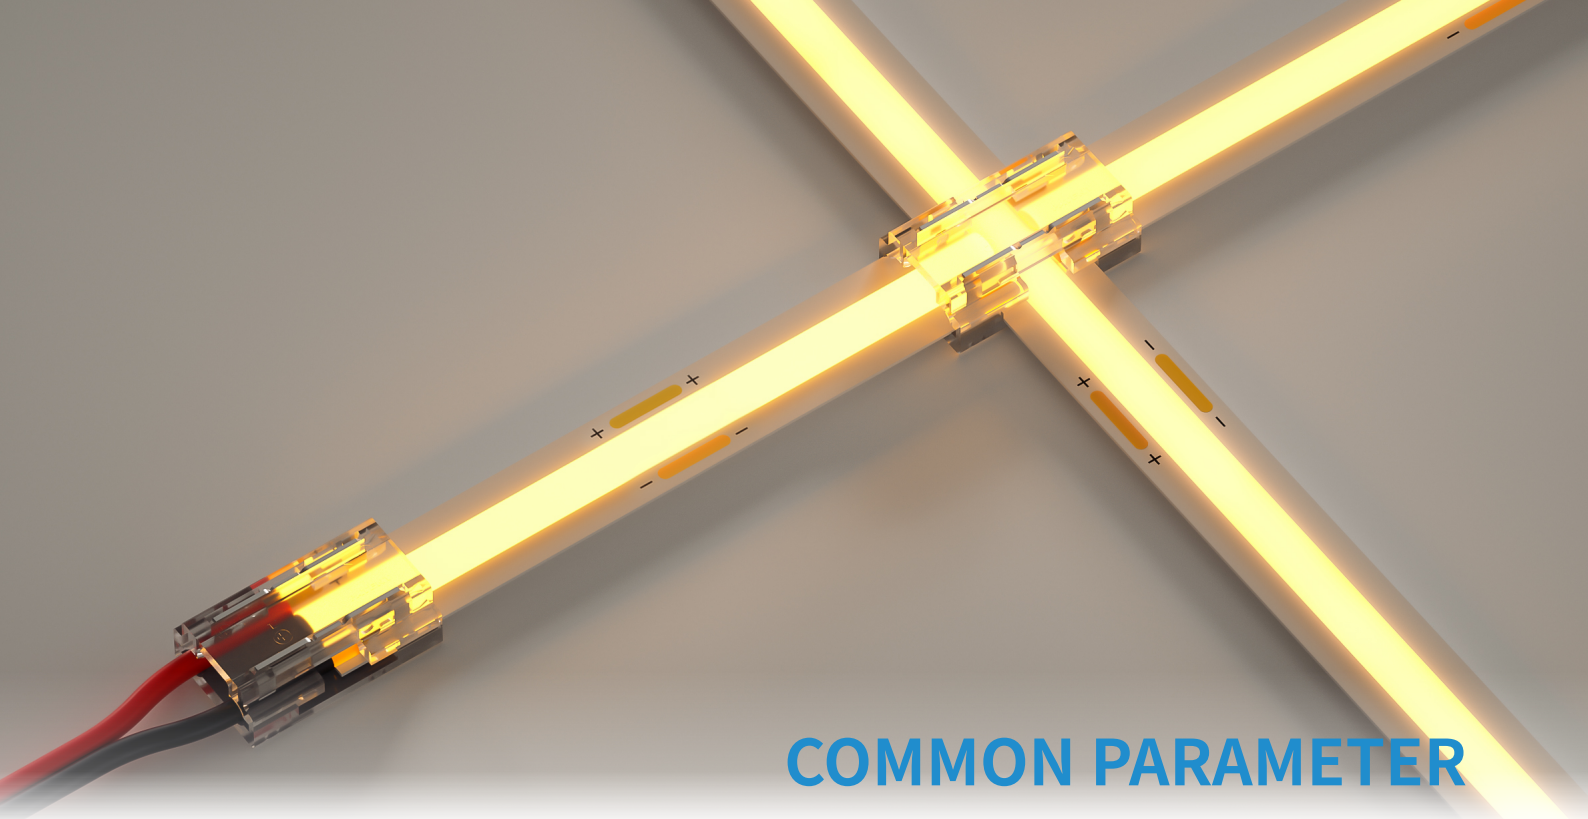

COMMON PARAMETER

LED Strip Width:	5mm / 8mm / 10mm
-------------------------	------------------

Pin Quantity:	2 Pins
----------------------	--------

Material:	Polycarbonate(PC), Phosphor bronze
------------------	------------------------------------

LED Strip IP Rating:	IP20
-----------------------------	------

Working Voltage:	DC3~24V
-------------------------	---------

Working Current:	Max 5A (@TA=30°C PCB=3OZ Wire Gauge=20AWG)
-------------------------	--

Wire Gauge:	20~22AWG (OD ≤ 1.80mm)
--------------------	------------------------

LED Strip Thickness:	0.25~0.35mm
-----------------------------	-------------

LED Light Type:	COB/HD SMD
------------------------	------------



LED Density:	No limit to COB, SMD Depends on SMD Size
---------------------	--

Standard Package Method:	PE Bag + Label + Carton
---------------------------------	-------------------------

Customization is acceptable, wire length, gauge, color and connector,etc.

SELECTION

For MONO Color

Item NO.	PCB Width	Types	LED Strip	Picture
BCX-5-2	5mm	Uniform Model	COB/HD SMD	
BCX-8-2	8mm	Uniform Model	COB/HD SMD	
BCX-10-2	10mm	Uniform Model	COB/HD SMD	