



Hippo-M Series

Never be more convenient with it







Hippo-M LED strip connector will bring you most convenience to your connection work. It support most led strip types with different diode, width, fpc thickness and waterproof method even there is no visible soldering pad on strip light. Further more user can attach different wire easily to this connector on site according to project requirement. With Hippo-M, your work or business will be so flexible.

How to use

1.Connect to LED Strip


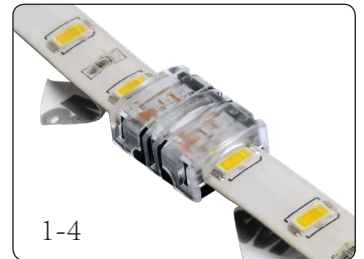


2.Attach Wire to Connector

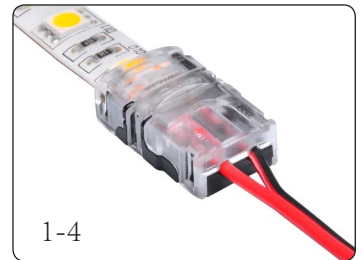

Take single color (strip to wire) as example, other color types are similar

Application Effect

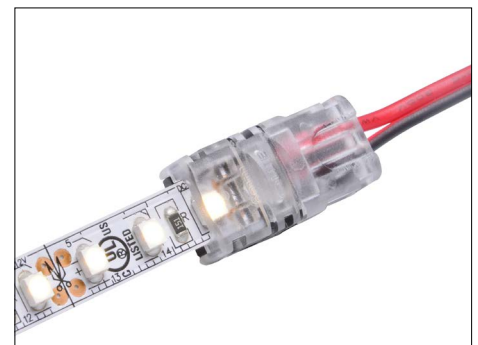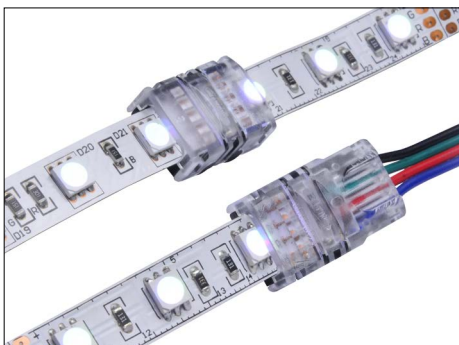

Model for Choice

Item NO.	DJN8XB-2	DJN8BB-2
Type	strip to wire	strip to strip joint
Dimension	24.3*12.6*7.7mm	19.6*12.6*7.7mm
Workable Wire Gauge	22~18 AWG / 0.34~0.78 mm ²	/
Voltage & Current	DC3~24V / Max.5A	
Pin Quantity	2 pins	
Strip Light Width	8 mm	
Strip Light Color	Single Color	
Strip Light IP Rating	IP54/65 -PU or Epoxy Cover Waterproof	
Material	PC & Copper	



Item NO.	DJN10XB-2	DJN10BB-2
Type	strip to wire	strip to strip joint
Dimension	24.3*14.6*7.7mm	19.6*14.6*7.7mm
Workable Wire Gauge	22~18 AWG / 0.34~0.78 mm ²	/
Voltage & Current	DC3~24V / Max.5A	
Pin Quantity	2 pins	
Strip Light Width	10 mm	
Strip Light Color	Single Color	
Strip Light IP Rating	IP54/65 -PU or Epoxy Cover Waterproof	
Material	PC & Copper	



Item NO.	DJN10XB-3	DJN10BB-3
Type	strip to wire	strip to strip joint
Dimension	24.3*14.6*7.7mm	19.6*14.6*7.7mm
Workable Wire Gauge	22~20 AWG / 0.34~0.54 mm ²	/
Voltage & Current	DC3~24V / Max.5A	
Pin Quantity	3 pins	
Strip Light Width	10 mm	
Strip Light Color	Dual Color / CCT	
Strip Light IP Rating	IP54/65 -PU or Epoxy Cover Waterproof	
Material	PC & Copper	



Item NO.	DJN10XB-4	DJN10BB-4
Type	strip to wire	strip to strip joint
Dimension	24.3*14.6*7.7mm	19.6*14.6*7.7mm
Workable Wire Gauge	22~20AWG / 0.34~0.54 mm ²	/
Voltage & Current	DC3~24V / Max.5A	
Pin Quantity	4 pins	
Strip Light Width	10 mm	
Strip Light Color	RGB	
Strip Light IP Rating	IP54/65 -PU or Epoxy Cover Waterproof	
Material	PC & Copper	



Item NO.	DJN12XB-5	DJN12BB-5
Type	strip to wire	strip to strip joint
Dimension	24.3*17*7.8mm	19.6*17*7.8mm
Workable Wire Gauge	22~20AWG / 0.34~0.54 mm ²	/
Voltage & Current	DC3~24V / Max.5A	
Pin Quantity	5 pins	
Strip Light Width	12 mm	
Strip Light Color	RGBW	
Strip Light IP Rating	IP54/65 -PU or Epoxy Cover Waterproof	
Material	PC & Copper	



Item NO.	DJN12XB-6	DJN12BB-6
Type	strip to wire	strip to strip joint
Dimension	24.3*17*7.8mm	19.6*17*7.8mm
Workable Wire Gauge	22~20AWG / 0.32~0.52mm ²	/
Voltage & Current	DC3~24V / Max.5A	
Pin Quantity	6 pins	
Strip Light Width	12 mm	
Strip Light Color	RGBWW(RGB+CCT)	
Strip Light IP Rating	IP54/65 -PU or Epoxy Cover Waterproof	
Material	PC & Copper	



Model for Choice

Item NO.	SEN5XB-2	SEN5BB-2
Type	strip to wire	strip to strip joint
Dimension	24.3*9.6*7.7mm	19.6*9.6*7.7mm
Workable Wire Gauge	22~20 AWG / 0.34~0.54 mm ²	/
Voltage & Current	DC3~24V / Max.5A	
Pin Quantity	2 pins	
Strip Light Width	5 mm	
Strip Light Color	Single Color	
Strip Light IP Rating	IP20 or Pure Silicon Waterproof (IP54/65)	
Material	PC & Copper	



Item NO.	SEN8XB-2	SEN8BB-2	WSEN8XB-2
Type	strip to wire	strip to strip joint	strip to wire
Product color	Black	Black	White
Dimension	24.3*12.6*7.7mm	19.6*12.6*7.7mm	24.3*12.6*7.7mm
Workable Wire Gauge	22~18 AWG / 0.34~0.78 mm ²	/	22~18 AWG / 0.34~0.78 mm ²
Voltage & Current	DC3~24V / Max.5A		
Pin Quantity	2 pins		
Strip Light Width	8 mm		
Strip Light Color	Single Color		
Strip Light IP Rating	IP20 or Pure Silicon Waterproof (IP54/65)		
Material	PC & Copper		



Item NO.	SEN8XB-2G	SEN8BB-2G
Type	strip to wire	strip to strip joint
Dimension	24.3*12.6*7.7mm	19.6*12.6*7.7mm
Workable Wire Gauge	22-20AWG/0.32-0.52mm ²	/
Voltage & Current	DC3~24V / Max.5A	
Pin Quantity	2 pins	
Strip Light Width	8 mm (High Density)	
Strip Light Color	Single Color	
Strip Light IP Rating	IP20 or Pure Silicon Waterproof (IP54/65)	
Material	PC & Copper	



Item NO.	SEN10XB-2	SEN10BB-2
Type	strip to wire	strip to strip joint
Dimension	24.3*14.6*7.7mm	19.6*14.6*7.7mm
Workable Wire Gauge	22~18 AWG / 0.34~0.78 mm ²	/
Voltage & Current	DC3~24V / Max.5A	
Pin Quantity	2 pins	
Strip Light Width	10 mm	
Strip Light Color	Single Color	
Strip Light IP Rating	IP20 or Pure Silicon Waterproof (IP54/65)	
Material	PC & Copper	



Item NO.	SEN10XB-3	SEN10BB-3
Type	strip to wire	strip to strip joint
Dimension	24.3*14.6*7.7mm	19.6*14.6*7.7mm
Workable Wire Gauge	22~20 AWG / 0.34~0.54 mm ²	/
Voltage & Current	DC3~24V / Max.5A	
Pin Quantity	3 pins	
Strip Light Width	10 mm	
Strip Light Color	Dual Color / CCT	
Strip Light IP Rating	IP20 or Pure Silicon Waterproof (IP54/65)	
Material	PC & Copper	



Item NO.	SEN10XB-4	SEN10BB-4	WSEN10XB-4	WSEN10BB-4
Type	strip to wire	strip to strip joint	strip to wire	strip to strip joint
Product color	Black	Black	White	White
Dimension	24.3*14.6*7.7mm	19.6*14.6*7.7mm	24.3*14.6*7.7mm	19.6*14.6*7.7mm
Workable Wire Gauge	22~20 AWG / 0.34~0.54 mm ²	/	22~20 AWG / 0.34~0.54 mm ²	/
Voltage & Current	DC3~24V / Max.5A			
Pin Quantity	4 pins			
Strip Light Width	10 mm			
Strip Light Color	RGB			
Strip Light IP Rating	IP20 or Pure Silicon Waterproof (IP54/65)			
Material	PC & Copper			



Item NO.	WSEN10XB-5	WSEN10BB-5
Type	strip to wire	strip to strip joint
Dimension	24.3*14.6*7.7mm	19.6*14.6*7.7mm
Workable Wire Gauge	22-20AWG/0.32-0.52mm ²	/
Voltage & Current	DC3~24V / Max.5A	
Pin Quantity	5 pins	
Strip Light Width	10 mm	
Strip Light Color	RGBW	
Strip Light IP Rating	IP20 or Pure Silicon Waterproof (IP54/65)	
Material	PC & Copper	



Item NO.	SEN10XB-2G	SEN10BB-2G
Type	strip to wire	strip to strip joint
Dimension	24.3*14.6*7.7mm	19.6*14.6*7.7mm
Workable Wire Gauge	22~18 AWG / 0.34~0.78 mm ²	/
Voltage & Current	DC3~24V / Max.5A	
Pin Quantity	2 pins	
Strip Light Width	10 mm (High Density)	
Strip Light Color	Single Color	
Strip Light IP Rating	IP20 or Pure Silicon Waterproof (IP54/65)	
Material	PC & Copper	



Item NO.	SEN12XB-2G	SEN12BB-2G
Type	strip to wire	strip to strip joint
Dimension	24.3*17*7.8mm	19.6*17*7.8mm
Workable Wire Gauge	22~18 AWG / 0.34~0.78 mm ²	/
Voltage & Current	DC3~24V / Max.5A	
Pin Quantity	2 pins	
Strip Light Width	12 mm (High Density)	
Strip Light Color	Single Color	
Strip Light IP Rating	IP20 or Pure Silicon Waterproof (IP54/65)	
Material	PC & Copper	



Item NO.	SEN12XB-5	SEN12BB-5
Type	strip to wire	strip to strip joint
Dimension	24.3*17*7.8mm	19.6*17*7.8mm
Workable Wire Gauge	22~20 AWG / 0.34~0.54 mm ²	/
Voltage & Current	DC3~24V / Max.5A	
Pin Quantity	5 pins	
Strip Light Width	12 mm	
Strip Light Color	RGBW	
Strip Light IP Rating	IP20 or Pure Silicon Waterproof (IP54/65)	
Material	PC & Copper	



Item NO.	SEN12XB-6	SEN12BB-6
Type	strip to wire	strip to strip joint
Dimension	24.3*17*7.8mm	19.6*17*7.8mm
Workable Wire Gauge	22-20AWG/0.32-0.52mm ²	/
Voltage & Current	DC3~24V / Max.5A	
Pin Quantity	6 pins	
Strip Light Width	12 mm	
Strip Light Color	RGBWW	
Strip Light IP Rating	IP20 or Pure Silicon Waterproof (IP54/65)	
Material	PC & Copper	

